

Review Article

DOI: <http://dx.doi.org/10.22192/ijamr.2020.07.04.001>

## Semiconductors

**Md Al Amin, Md Abu Sayem**

Department of Mechanical and Electrical Integration Technology  
Jiangsu Agri Animal Husbandry Vocational College, Taizhou, Jiangsu, China  
Corresponding Author: Md Al Amin  
E-mail: [alaminbingolam98@hotmail.com](mailto:alaminbingolam98@hotmail.com)

### Keywords

Semiconductors,  
Properties,  
Types,  
Applications

### Abstract

Semiconductors are materials which have a conductivity between conductors (generally metals) and nonconductors or insulators (such as most ceramics). Semiconductors can be pure elements, such as silicon or germanium, or compounds such as gallium arsenide or cadmium selenide. In a process called doping, small amounts of impurities are added to pure semiconductors causing large changes in the conductivity of the material.

## 1. Introduction

A semiconductor can be considered a material having a conductivity ranging between that of an insulator and a metal. A crucial property of semiconductors is the band gap; a range of forbidden energies within the electronic structure of the material. Semiconductors typically have bandgaps ranging between 1 and 4 eV, whilst insulators have larger bandgaps, often greater than 5 eV [1]. The thermal energy available at room temperature, 300 K, is approximately 25 meV and is thus considerably smaller than the energy required to promote an electron across the bandgap. This means that there are a small number of carriers present at room temperature, due to the high energy tail of the Boltzmann-like thermal energy distribution. It is the ability to control the number of charge carriers that makes semiconductors of great technological importance.

Semiconducting materials are very sensitive to impurities in the crystal lattice as these can have a dramatic effect on the number of mobile charge carriers present. The controlled addition of these

impurities is known as doping and allows the tuning of the electronic properties, an important requirement for technological applications. The properties of a pure semiconductor are called 'intrinsic', whilst those resulting from the introduction of dopants are called 'extrinsic'. This introduction of dopants results in the creation of new, intra-band, energy levels and the generation of either negative (electrons) or positive (holes) charge carriers.

## 2. Holes and Electrons in Semiconductors

Holes and electrons are the types of charge carriers accountable for the flow of current in semiconductors. Holes (valence electrons) are the positively charged electric charge carrier whereas electrons are the negatively charged particles. Both electrons and holes are equal in magnitude but opposite in polarity.

### 2.1. Mobility of Electrons and Holes


In a semiconductor, the mobility of electrons is higher than that of the holes. It is mainly because of their different band structures and scattering mechanisms. Electrons travel in the conduction band whereas holes travel in the valence band. When an electric field is applied, holes cannot move as freely as electrons due to their restricted movement. The elevation of electrons from their inner shells to higher shells results in the creation of holes in semiconductors. Since the holes experience stronger atomic force by the nucleus than electrons, holes have lower mobility.

The mobility of a particle in a semiconductor is more if;

- ) Effective mass of particles is lesser
- ) Time between scattering events is more

For intrinsic silicon at 300 K, the mobility of electrons is  $1500 \text{ cm}^2 (\text{V}\cdot\text{s})^{-1}$  and the mobility of holes is  $475 \text{ cm}^2 (\text{V}\cdot\text{s})^{-1}$ .

The bond model of electrons in silicon of valency 4 is shown below. Here, when one of the free electrons (blue dots) leaves the lattice position, it creates a hole (grey dots). This hole thus created takes the opposite charge of the electron and can be imagined as positive charge carriers moving in the lattice.

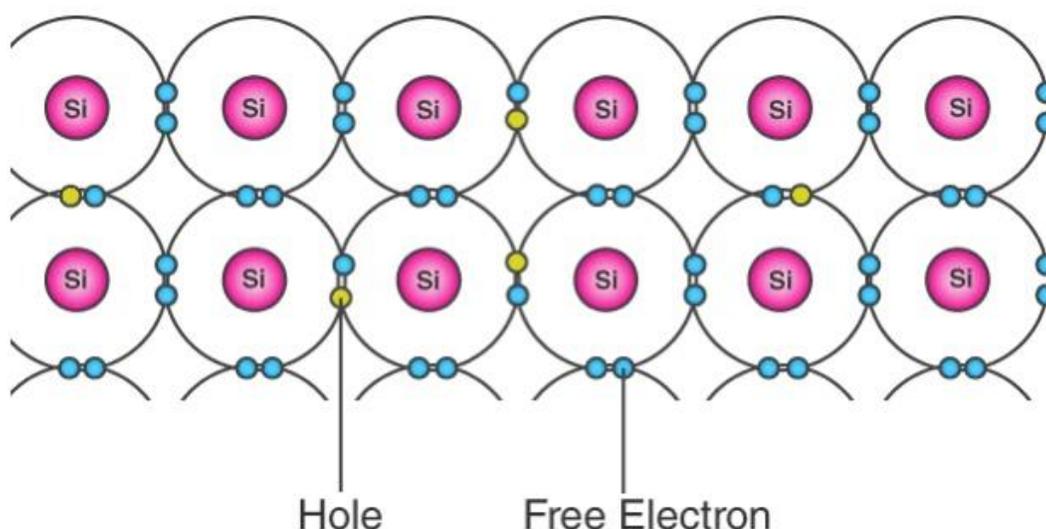

*Concept of Electrons and Holes in Semiconductors*

### 3. Band Theory of Semiconductors

The introduction of band theory happened during the quantum revolution in science. Walter Heitler and Fritz London discovered the energy bands.


We know that the electrons in an atom are present in different energy level. When we try to assemble a

lattice of a solid with N atoms, then each level of an atom must split up into N levels in the solid. This splitting up of sharp and tightly packed energy levels forms Energy Bands. The gap between adjacent bands representing a range of energies that possess no electron is called a Band Gap.

Energy Band Diagram for Semiconductors, Conductors, and Insulators



## ENERGY BAND GAPS IN MATERIALS

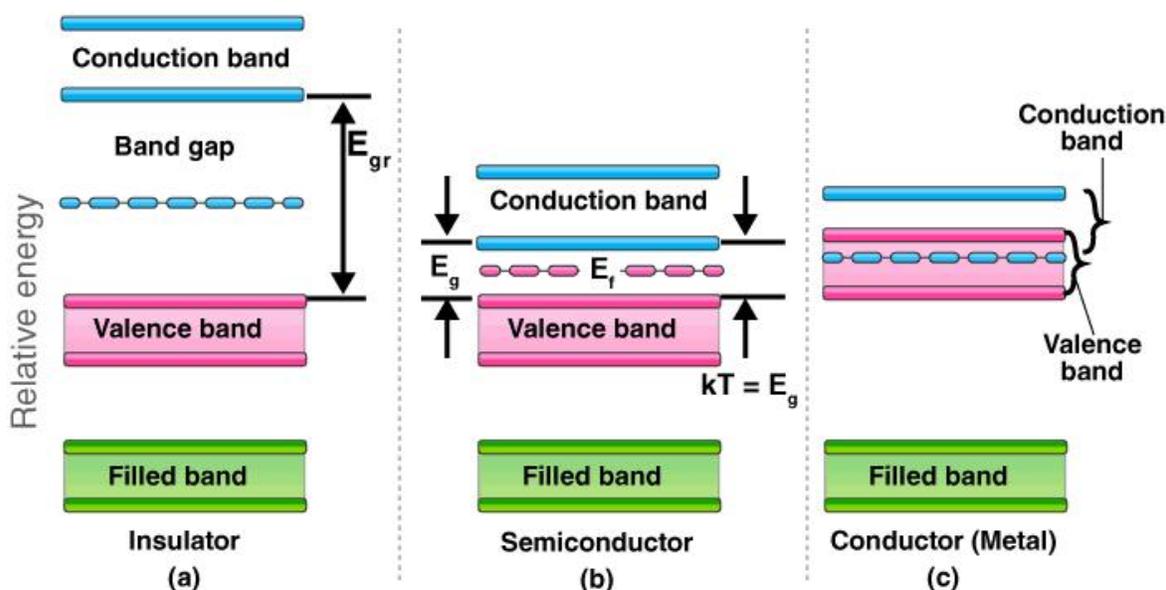

© Byjus.com

### 3.1 Conduction Band and Valence Band in Semiconductors

**Valence Band:** The energy band involving the energy levels of valence electrons is known as the valence band. It is the highest occupied energy band. When compared with insulators, the bandgap in semiconductors is smaller. It allows the electrons in the valence band to jump into the conduction band on receiving any external energy.

**Conduction Band:** It is the lowest unoccupied band that includes the energy levels of positive (holes) or negative (free electrons) charge carriers. It has conducting electrons resulting in the flow of current. The conduction band possess high energy level and are generally empty. The conduction band in semiconductors accepts the electrons from the valence band.

### 3.2 What is Fermi Level in Semiconductors?

Fermi level (denoted by  $E_f$ ) is present between the valence and conduction bands. It is the highest occupied molecular orbital at absolute zero. The charge carriers in this state have their own quantum states and generally do not interact with each other. When the temperature rises above absolute zero, these charge carriers will begin to occupy states above Fermi level.

In a p-type semiconductor, there is an increase in the density of unfilled states. Thus, accommodating more electrons at the lower energy levels. However, in an n-type semiconductor, the density of states increases, therefore, accommodating more electrons at higher energy levels.

## 4. Properties of Semiconductors

Semiconductors can conduct electricity under preferable conditions or circumstances. This unique property makes it an excellent material to conduct electricity in a controlled manner as required.

Unlike conductors, the charge carriers in semiconductors arise only because of external energy (thermal agitation). It causes a certain number of valence electrons to cross the energy gap and jump into the conduction band, leaving an equal amount of unoccupied energy states, i.e. holes. Conduction due to electrons and holes are equally important.

- ) **Resistivity:** 10<sup>-5</sup> to 10<sup>6</sup> m
- ) **Conductivity:** 10<sup>5</sup> to 10<sup>-6</sup> mho/m
- ) **Temperature:** coefficient of resistance: Negative
- ) **Current Flow:** Due to electrons and holes

#### 4.1 Why does the Resistivity of Semiconductors go down with Temperature?

The difference in resistivity between conductors and semiconductors is due to their difference in charge carrier density.

The resistivity of semiconductors decreases with temperature because the number of charge carriers increases rapidly with increase in temperature making the fractional change i.e. the temperature coefficient negative.

#### 4.2 Some Important Properties of Semiconductors are:


1. Semiconductor acts like an insulator at Zero Kelvin. On increasing the temperature, it works as a conductor.

2. Due to their exceptional electrical properties, semiconductors can be modified by doping to make semiconductor devices suitable for energy conversion, switches, and amplifiers.
3. Lesser power losses.
4. Semiconductors are smaller in size and possess less weight.
5. Their resistivity is higher than conductors but lesser than insulators.
6. The resistance of semiconductor materials decreases with the increase in temperature and vice-versa.

### 5. Types of Semiconductors

Semiconductors can be classified as:

- ) Intrinsic Semiconductor
- ) Extrinsic Semiconductor

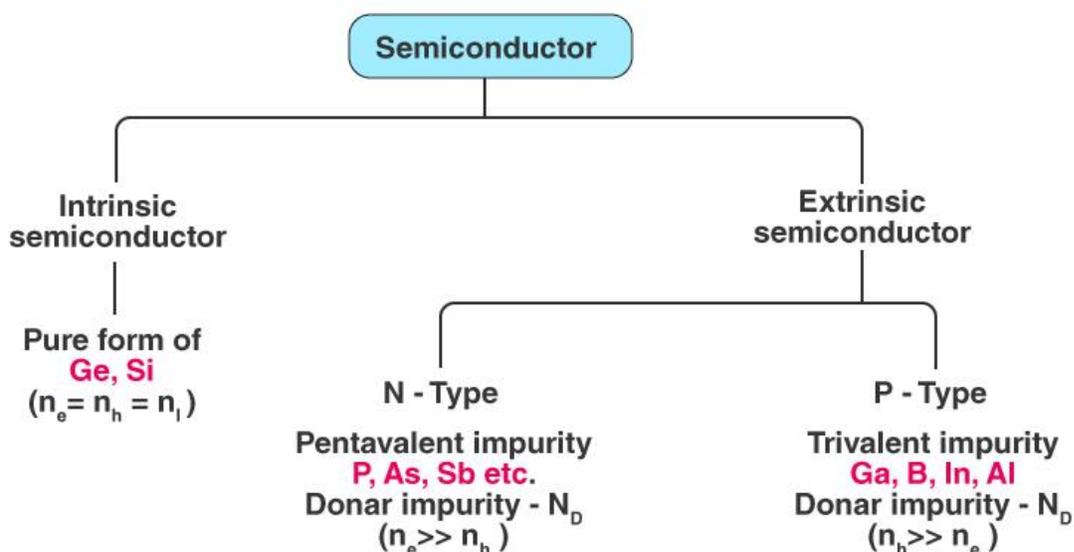


© Byjus.com

### Classification of Semiconductors

#### 5.1 Intrinsic Semiconductor

An intrinsic type of semiconductor material is made to be very pure chemically. It is made up of only a single type of element.

**Conduction Mechanism in Case of Intrinsic Semiconductors (a) In absence of electric field (b) In presence of electric Field**

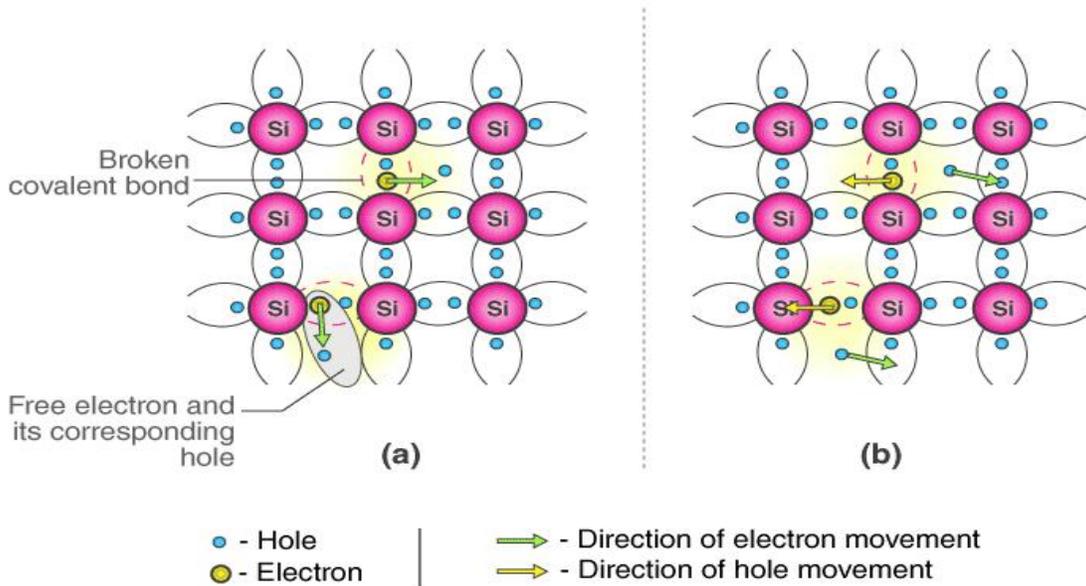

© Byjus.com

Germanium (Ge) and Silicon (Si) are the most common type of intrinsic semiconductor elements. They have four valence electrons (tetravalent). They are bound to the atom by covalent bond at absolute zero temperature.

When the temperature rises, due to collisions, few electrons are unbound and become free to move through the lattice, thus creating an absence in its original position (hole). These free electrons and holes contribute to the conduction of electricity in the semiconductor. The negative and positive charge carriers are equal in number.


The thermal energy is capable of ionizing a few atoms in the lattice, and hence their conductivity is less.

**5.2 Lattice of Pure Silicon Semiconductor at Different Temperatures**

- ) At absolute zero kelvin temperature: At this temperature, the covalent bonds are very strong and there are no free electrons and the semiconductor behaves as a perfect insulator.
- ) Above absolute temperature: With the increase in temperature few valence electrons jump into the conduction band and hence it behaves like a poor conductor.

**5.3 Energy Band Diagram of Intrinsic Semiconductor**

The energy band diagram of an intrinsic semiconductor is shown below:

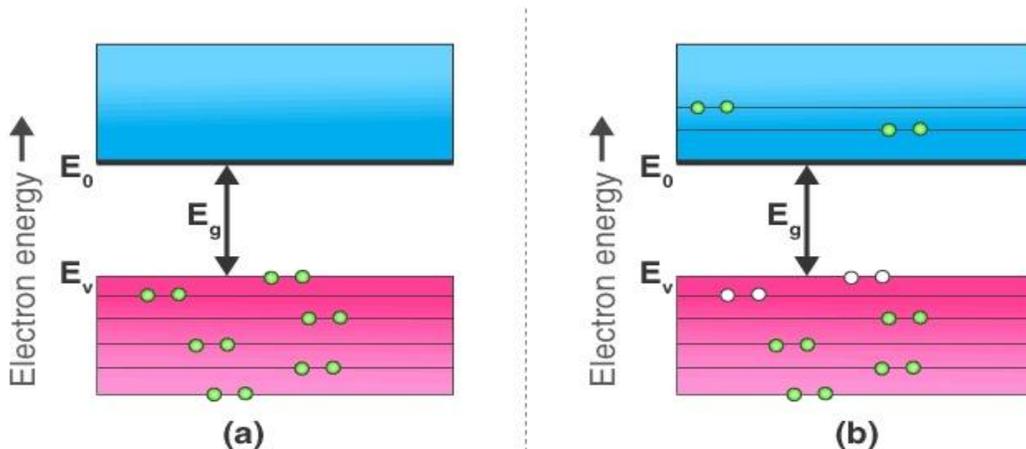

© Byjus.com

*(a) Intrinsic Semiconductor at T = 0 Kelvin, behaves like an insulator (b) At t>0, four thermally generated electron pairs*

In intrinsic semiconductors, current flows due to the motion of free electrons as well as holes. The total current is the sum of the electron current  $I_e$  due to thermally generated electrons and the hole current  $I_h$

$$\text{Total Current (I)} = I_e + I_h$$

For an intrinsic semiconductor, at finite temperature, the probability of electrons to exist in conduction band decreases exponentially with increasing bandgap ( $E_g$ )  
 $n = n_0 e^{-E_g/2.K_b.T}$

Where,


- )  $E_g$  = Energy bandgap
- )  $K_b$  = Boltzmann's constants

### 5.4 Extrinsic Semiconductor

The conductivity of semiconductors can be greatly improved by introducing a small number of suitable replacement atoms called IMPURITIES. The process of adding impurity atoms to the pure semiconductor is called DOPING. Usually, only 1 atom in  $10^7$  is replaced by a dopant atom in the doped semiconductor. An extrinsic semiconductor can be further classified into:

- ) N-type Semiconductor
- ) P-type Semiconductor

## EXTRINSIC SEMICONDUCTORS

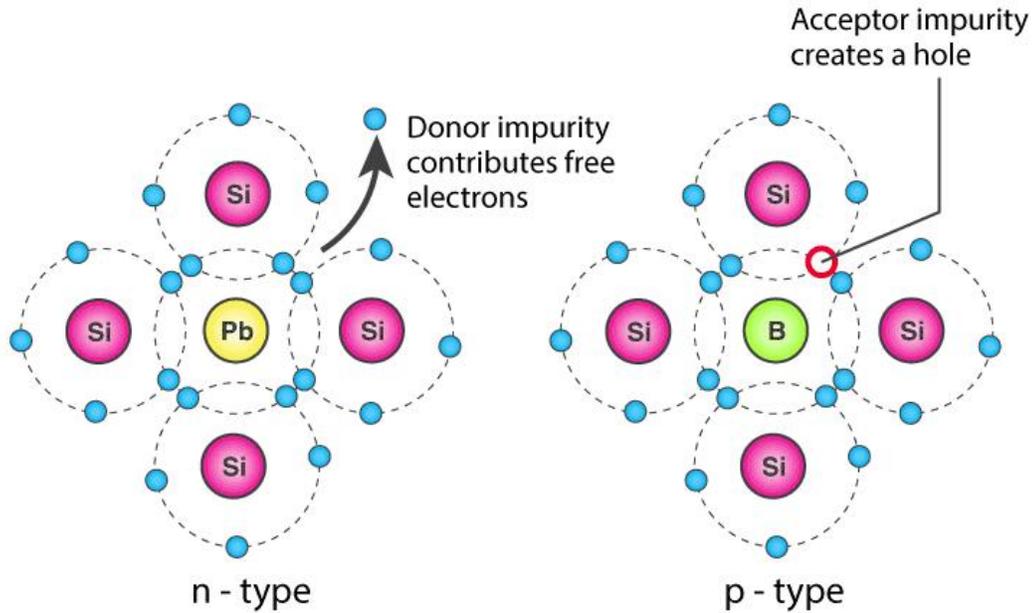

© Byjus.com

## Classification of Extrinsic Semiconductor

### 5.6 N-Type Semiconductor

- ) Mainly due to electrons
- ) Entirely neutral
- )  $I = I_h \text{ and } n_h \gg n_e$
- ) Majority – Electrons and Minority – Holes

When a pure semiconductor (Silicon or Germanium) is doped by pentavalent impurity (P, As, Sb, Bi) then, four electrons out of five valence electrons bonds with the four electrons of Ge or Si.

The fifth electron of the dopant is set free. Thus the impurity atom donates a free electron for conduction in the lattice and is called “Donor”.

Since the number of free electron increases by the addition of an impurity, the negative charge carriers increase. Hence it is called n-type semiconductor.

Crystal as a whole is neutral, but the donor atom becomes an immobile positive ion. As conduction is due to a large number of free electrons, the electrons in the n-type semiconductor are the MAJORITY CARRIERS and holes are the MINORITY CARRIERS.

### 5.8 Difference between Intrinsic and Extrinsic Semiconductors

Intrinsic Semiconductor	Extrinsic Semiconductor
Pure semiconductor	Impure semiconductor
Density of electrons is equal to the density of holes	Density of electrons is not equal to the density of holes
Electrical conductivity is low	Electrical conductivity is high
Dependence on temperature only	Dependence on temperature as well as on the amount of impurity
No impurities	Trivalent impurity, pentavalent imp

## 6. Applications of Semiconductors

Let us now understand the uses of semiconductors in daily life. Semiconductors are used in almost all electronic devices. Without them, our life would be much different.

Their reliability, compactness, low cost and controlled conduction of electricity make them ideal to be used for various purposes in a wide range of components and devices. transistors, diodes, photosensors, microcontrollers, integrated chips and much more are made up of semiconductors.

### 5.7 P-Type Semiconductor

- ) Mainly due to holes
- ) Entirely neutral
- )  $I = I_h \text{ and } n_h \gg n_e$
- ) Majority – Holes and Minority – Electrons

When a pure semiconductor is doped with a trivalent impurity (B, Al, In, Ga ) then, the three valence electrons of the impurity bonds with three of the four valence electrons of the semiconductor.

This leaves an absence of electron (hole) in the impurity. These impurity atoms which are ready to accept bonded electrons are called “Acceptors”.

With the increase in the number of impurities, holes (the positive charge carriers) are increased. Hence, it is called p-type semiconductor.

Crystal as a whole is neutral, but the acceptors become an immobile negative ion. As conduction is due to a large number of holes, the holes in the p-type semiconductor are MAJORITY CARRIERS and electrons are MINORITY CARRIERS.

### 6.1 Uses of Semiconductors in Everyday life

- ) Temperature sensors are made with semiconductor devices.
- ) They are used in 3D printing machines
- ) Used in microchips and self-driving cars
- ) Used in calculators, solar plates, computers and other electronic devices.
- ) Transistor and MOSFET used as a switch in Electrical Circuits are manufactured using the semiconductors.

### 6.2 Industrial Uses of Semiconductors

The physical and chemical properties of semiconductors make them capable of designing technological wonders like microchips, transistors, LEDs, solar cells, etc.

The microprocessor used for controlling the operation of space vehicles, trains, robots, etc is made up of transistors and other controlling devices which are manufactured by semiconductor materials.

### 6.3 Importance of Semiconductors

Here we have discussed some advantages of semiconductors which makes them highly useful everywhere.

- ) They are highly portable due to the smaller size
- ) They require less input power
- ) Semiconductor devices are shockproof
- ) They have a longer lifespan
- ) They are noise-free while operating

### References

1. Abu Sayem, Tajmin Nahar, Al-Shams, Abu Sayed, Masum Rana, Alamin Bin Golam, Md Khaza Main Uddin. (2019). 'Programmable logic controller'.

2. Feynman, Richard (1963). Feynman Lectures on Physics. Basic Books.

3. a b c d e f g Neamen, Donald. "Semiconductor Physics and Devices" (PDF). Elizabeth A. Jones.

4. By Abdul Al-Azzawi. "Light and Optics: Principles and Practices." 2007. March 4, 2016.

5. "Experimental observation of high thermal conductivity in boron arsenide". Science. 361 (6402): 575–78. Bibcode: 2018Sci...361..575K. doi:10.1126/science.aat5522. PMID 29976798.

6. Lojek, Bo (2007). History of Semiconductor Engineering. Springer Science & Business Media. pp. 120, 321–23. ISBN 9783540342588.

7. Bassett, Ross Knox (2007). To the Digital Age: Research Labs, Start-up Companies, and the Rise of MOS Technology. Johns Hopkins University Press. p. 46. ISBN 9780801886393.

8. Donovan, R. P. (November 1966). "The Oxide-Silicon Interface". Fifth Annual Symposium on the Physics of Failure in Electronics: 199–231. doi:10.1109/IRPS.1966.362364.

9. "Surface Passivation – an overview". Science Direct. Retrieved 19 August 2019.

10. "1960 Metal Oxide Semiconductor (MOS) Transistor Demonstrated". The Silicon Engine. Computer History Museum.

11. B.G. Yacobi, Semiconductor Materials: An Introduction to Basic Principles, Springer 2003 ISBN 0-306-47361-5, pp. 1–3

12. Yu, Peter (2010). Fundamentals of Semiconductors. Berlin: Springer-Verlag. ISBN 978-3-642-00709-5.

13. Amorphous semiconductors 1968

Access this Article in Online	
	Website: <a href="http://www.ijarm.com">www.ijarm.com</a>
	Subject: <a href="#">Engineering and Technology</a>
Quick Response Code	
DOI: <a href="https://doi.org/10.22192/ijarmr.2020.07.04.001">10.22192/ijarmr.2020.07.04.001</a>	

#### How to cite this article:

Md Al Amin, Md Abu Sayem. (2020). Semiconductors. Int. J. Adv. Multidiscip. Res. 7(4): 1-8.  
DOI: <http://dx.doi.org/10.22192/ijarmr.2020.07.04.001>